



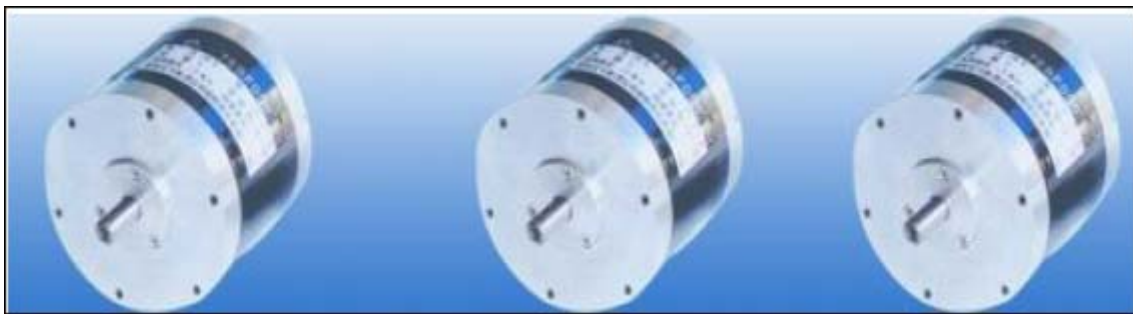


技术参数


型号	相数	步距角 (DEG.)	电压 (V)	电流 (A)	保持转矩 (kg. cm)	空载启动频率 (HZ)	接线图	备注
70BF003	3	1.5° /3°	27	3	0.784 (8)	1600	1	
75BF001	3	1.5° /3°	24	3	0.392 (4)	1750	1	
75BF001A	3	1.5° /3°	24	3	0.788 (8)	1550	1	
75BF003	3	1.5° /3°	30	4	0.882 (9)	1250	1	
75BF003A	3	1.5° /3°	30	4	1.25 (12)	1400	1	
75BC340	3	1.5° /3°	30	3	0.392 (4)	2000	1	
75BC340A	3	1.5° /3°	30	4	0.88 (9)	1900	1	
75BC380	3	0.75° /1.5°	30	3	0.68 (7)	2000	1	
75BC380A	3	0.75° /1.5°	30	3	0.98 (10)	2200	1	
75BF006	5	0.36° /0.72°	24	2.4	1.23 (12)	1500	3	

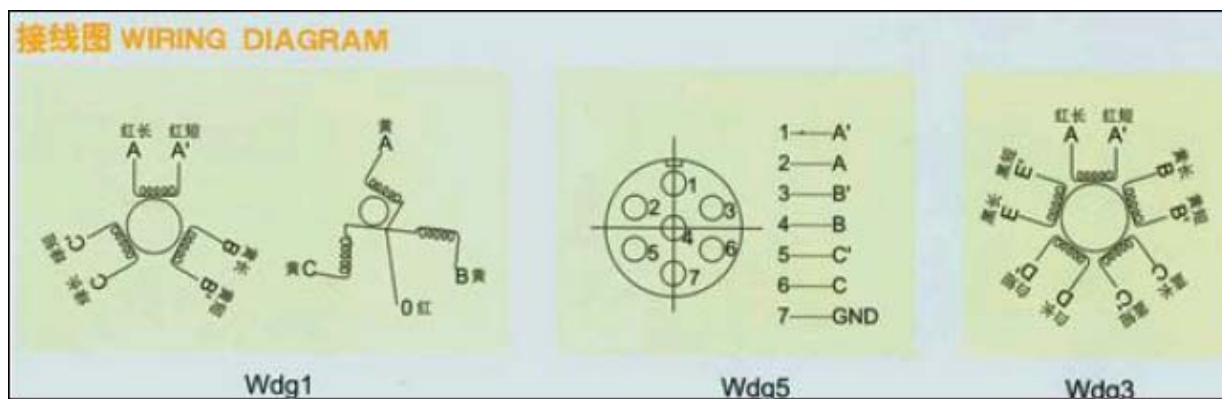

外形安装尺寸 (mm)

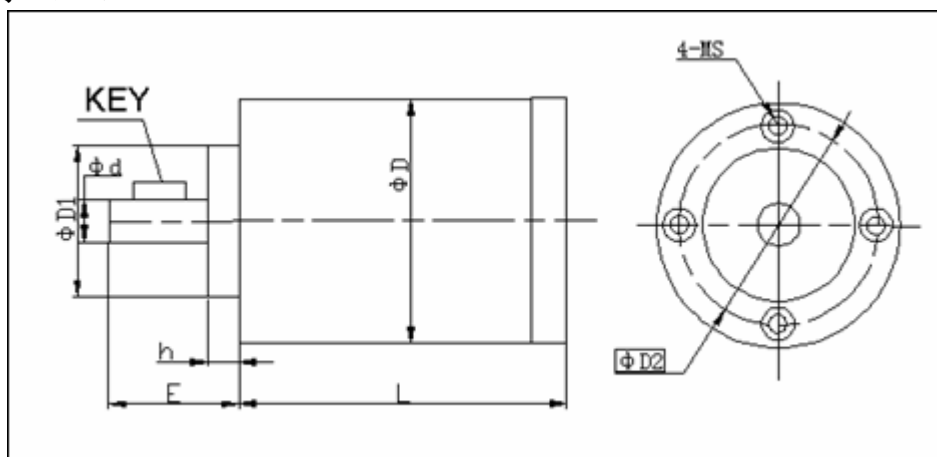

型号	ϕD	$\phi D1$	h	ϕd	E	L	$\phi D2$	MS	键 KEY
70BF003	70	45 0	3	8 -0.013	25	63	54	4-M4	
75BF001	75	31 0	2	6 -0.01	18	55	68	3-M4	2× $\phi 10$
75BF001A	75	31 0	2	6 -0.01	18	55	68	3-M4	2× $\phi 10$
75BF003	75	31 0	2	8 -0.013	18	77	68	3-M4	2× $\phi 10$
75BF003A	75	31 0	2	8 -0.013	18	67	68	3-M4	2× $\phi 10$
75BC340	75	31 0	2	8 -0.013	25	61	68	3-M4	2× $\phi 10$
75BC340A	75	31 0	2	8 -0.013	25	77	68	3-M4	2× $\phi 10$
75BC380	75	31 0	2	8 -0.013	25	61	68	3-M4	2× $\phi 10$
75BC380A	75	31 0	2	8 -0.013	25	53	68	3-M4	2× $\phi 10$
75BF006	75	31 0	2	8 -0.013	18	60	68	3-M4	2× $\phi 10$

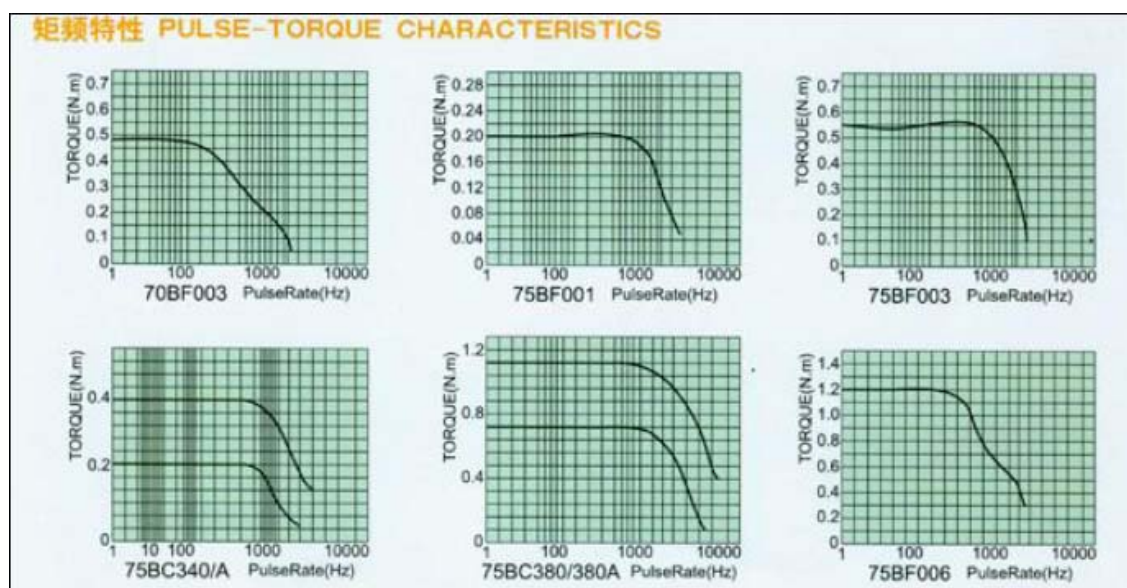

常州双杰电子有限公司
江苏省常州市戚墅堰芳渚村 360 号
电话: 0519-88352577 88359735
传真: 0519-88352858
www.czshuangjie.com

CHANGZHOU MOTORS AND ELECTRIC APPLIANCE CO., LTD.
Adrees:360 Fangzhu Qishuyan Changzhou China
TEL: 086-519-88352577
FAX: 086-519-88352858